

Hiab Multilift

# XR Power range hooklifts




**TECHNICAL INFORMATION**

# XR16T

## TECHNICAL DATA

TYPE	XR16T		
VEHICLE TYPE	3 axle		
GVW OF THE VEHICLE (t)	26		
CAPACITY (t)	16		
G-LENGTH	46	51	55
SYSTEM WEIGHT (kg) *	1750	1850	1990
TIPPING ANGLE (°)	50	49	49
MAX. OPERATING PRESSURE (MPa)	30		
RECOMMENDED MAX. OIL FLOW (l/min)	80 (special 120)		

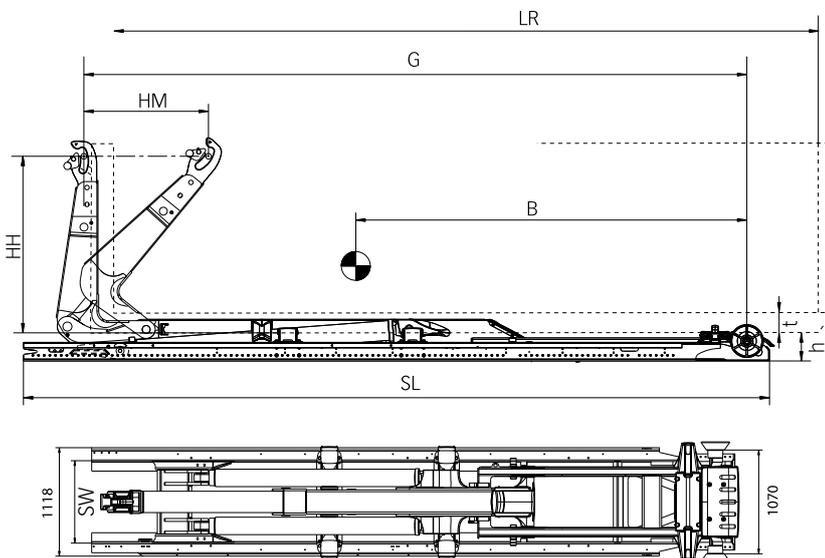

\* Weight includes hydraulic body locking and excludes oil tank and oil.

\*\* The subframe length (SL) can be reduced to achieve a final installation length. The minimum installation length depends upon country and control valve position. For an exact installation length dimension please contact your local Hiab Multilift dealer.

\*\*\* Other hook heights for different body standards available.

Hiab Multilift equipments meet the demands set forth in the EU Machine Directive and they are CE marked.

We reserve the rights for modifications. Illustrations do not always show an equipment in standard version.

## PRIMARY DIMENSIONS

MODEL	XR16T.46	XR16T.51	XR16T.55
LR = BODY LENGTH (m) min - max	3,8 - 5,6	4,3 - 6,1	4,7 - 6,5
SL = SUBFRAME LENGTH (mm) **	5308	5758	6758
SW = SUBFRAME INSTALLATION WIDTH (mm)	850	850	852
B = CENTRE OF GRAVITY (mm)	2550	2800	3200
G = EXACT G-LENGTH (mm)	4580	5080	5480
HM = HORIZONTAL MOVEMENT (mm)	1100	1100	1100
t = MIN. FREE TUNNEL HEIGHT (body) (mm)		125	
h = INSTALLATION HEIGHT (mm)		230	
HH = HOOK HEIGHT (mm) ***		1570	

Cargotec improves the efficiency of cargo flows on land and at sea – wherever cargo is on the move. Cargotec's daughter brands Hiab, Kalmar and MacGregor are recognised leaders in cargo and load handling solutions around the world. Cargotec's global network is positioned close to customers and offers extensive services that ensure the continuous, reliable and sustainable performance of equipment. [www.cargotec.com](http://www.cargotec.com)



**Cargotec Finland Oy**  
 Nesteentie 36, P.O.Box 39  
 FI-21201 Raisio, Finland  
 tel. +358 204 55 2399  
 fax +358 204 55 2231  
[www.hiab.com](http://www.hiab.com)