



HIAB BRICK HANDLERS



HIAB BRICK HANDLERS

HIAB X-CLX 132 HS

Model	B - 1	B - 2	
Lifting Capacity	120	113	Knm
Outreach - Lifting capacity standard	2.8/4300	2.8/4000	m/kg
	4.3/2800	4.4/2600	m/kg
	6.1/2000	6.2/1840	m/kg
		8.2/1400	m/kg
Hydraulic Outreach standard	6.3	8.4	m
Hydraulic boom extension	1.9	3.9	m
Lifting height Installation level, hydraulic	8.7	10.8	m
Install space required. Rotation area not included	1020	1018	mm
Weight			
Crane in standard version	1785	1520	kg
Brick Grab and Continuous Rotator		300	kg

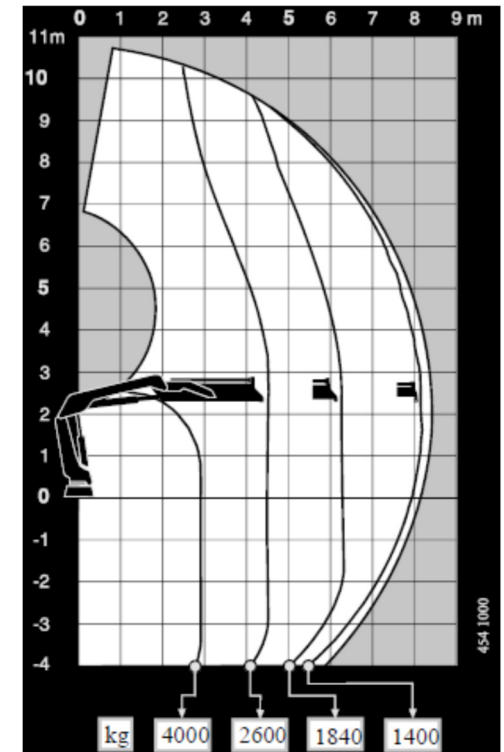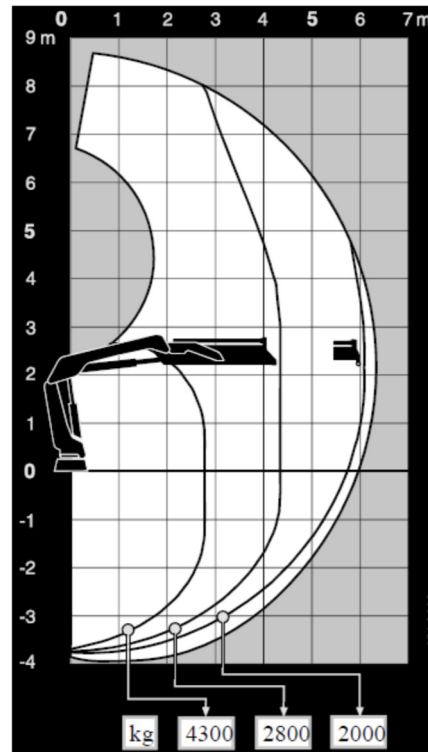

HIAB BRICK HANDLERS

HIAB X-CLX 152 HS

Model	B - 1	B - 2	
Lifting Capacity	139	134	Knm
Outreach - Lifting capacity standard	2.8/4900	2.8/4600	m/kg
	4.3/3300	4.3/3100	m/kg
	6.0/2300	6.1/2200	m/kg
		8.0/1660	m/kg
Hydraulic Outreach standard	6.3	8.4	m
Hydraulic boom extension	1.9	3.9	m
Lifting height installation level, hydraulic	8.7	10.8	m
Install space required. Rotation area not included	1030	1020	mm
Weight			
Crane in standard version	1885	2015	kg
Brick Grab and Continuous Rotator		300	kg



HIAB BRICK HANDLERS

HIAB X-CLX 178 HS

Model	B - 2	B - 3	
Lifting Capacity	157	152	Knm
Outreach - Lifting capacity standard	3.2/5000	3.4/4550	m/kg
	4.6/3450	4.6/3350	m/kg
	6.4/2460	6.4/2320	m/kg
	8.4/1860	8.4/1720	m/kg
		10.5/1360	m/kg
Hydraulic Outreach standard	8.6	10.8	m
Hydraulic boom extension	3.9	6	m
Lifting height installation level, hydraulic	10.8	13.2	m
Install space required. Rotation area not included	1125	1125	mm
Weight			
Crane in standard version	2100	2281	kg
Brick Grab and Continuous Rotator		300	kg

